


CHRONOS • LSH-1100-N

**Stretch Hooder**



## Stretch Hooder

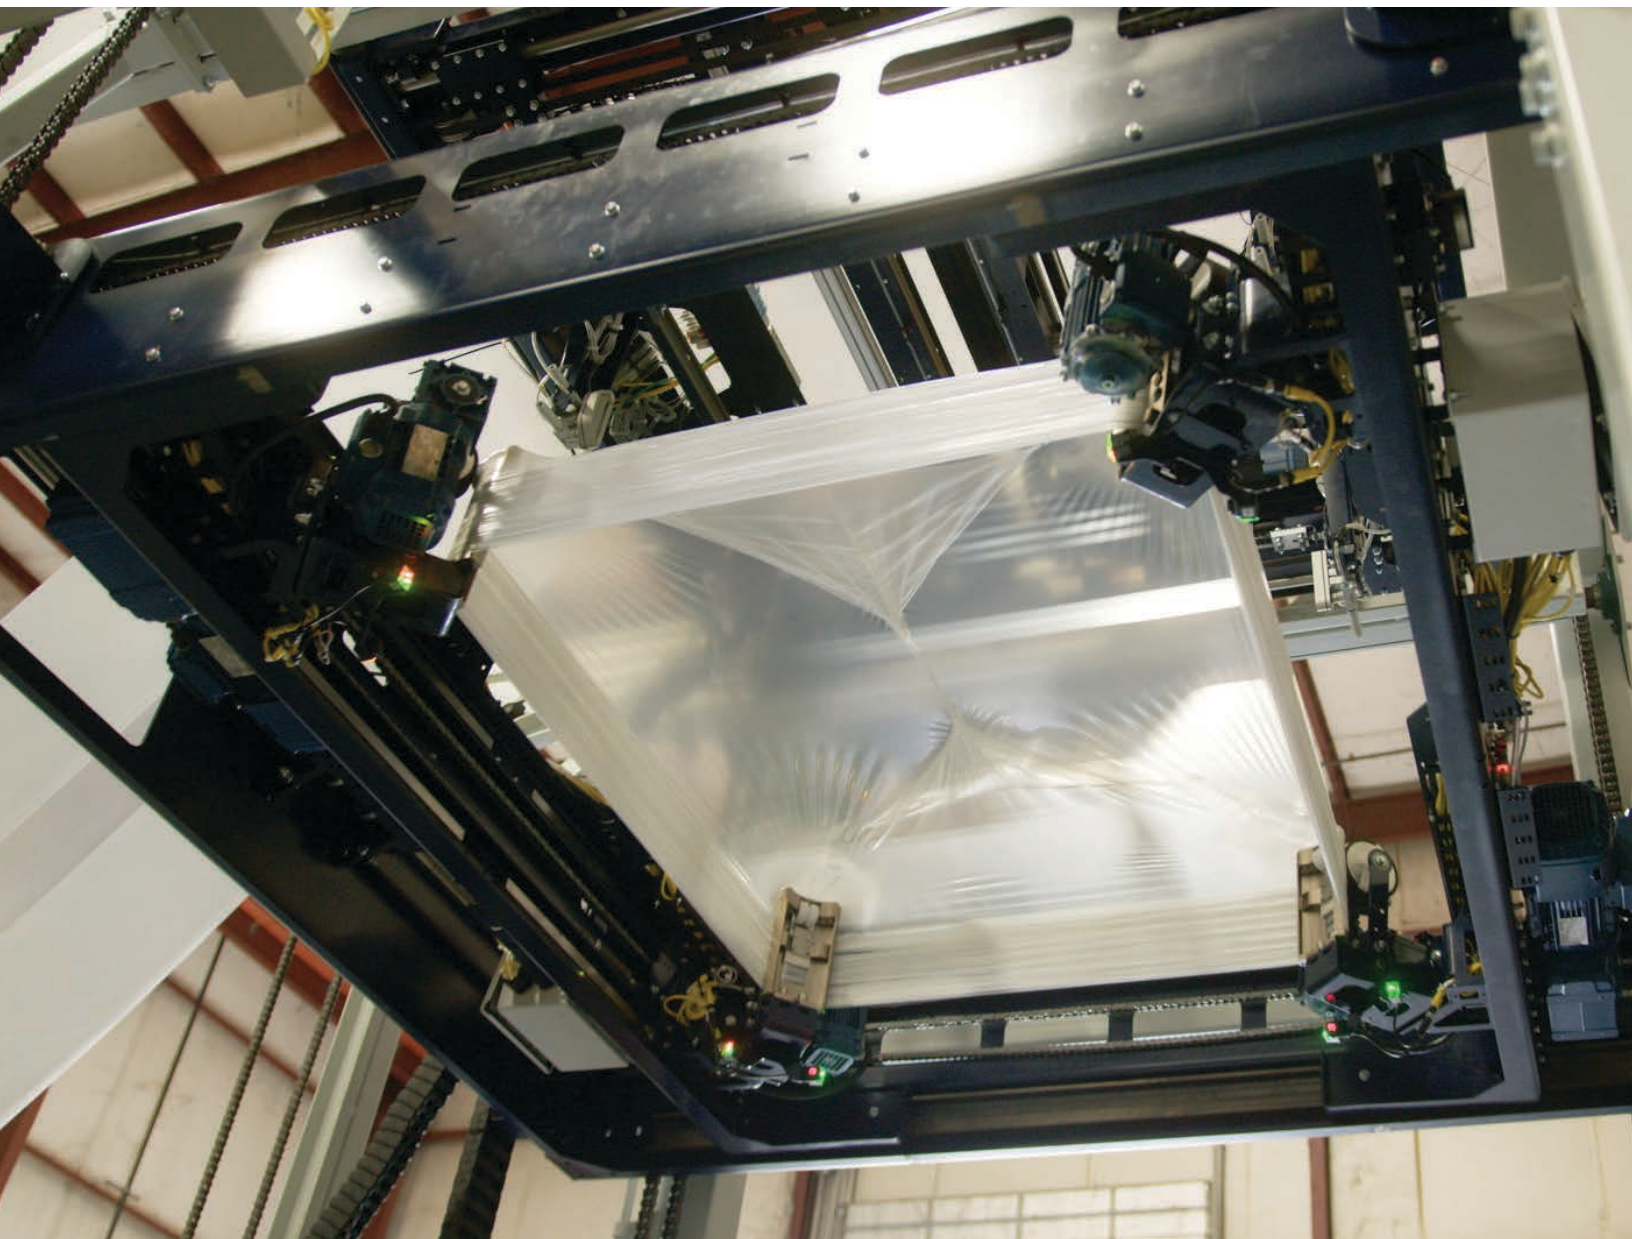

**UP TO 100 LOADS PER HOUR\***

\*Depending on load height, film thickness, and other specifications

### Optimal protection

The Stretch Hooder efficiently covers loads from top to bottom in one stroke, ensuring optimal protection against water and weather conditions.

### Ease of use

It requires little maintenance and is easy to operate. The mobile film-loading system eliminates the need for an elevated platform by lowering the film carriage to a safe working height.

### Cost-effective

It adjusts to load heights for consistent and minimal film consumption. It can cover up to 2000 loads per roll depending on load and film characteristics, offering extended autonomy compared to other technologies.

✓ **The CHRONOS Stretch Hooder efficiently secures various load types, including mixed, uneven, short, tall, heavy, and light. It ensures load stability even when the hood is opened, making it ideal for maneuvering the load.**

### Applications



Containers



Bags




Boxes



Jugs



Big Bags



Trays



Barrels

### Load types



Full bag pallet



Half box pallet




Jug pallet



Mixed load pallet

REQUEST A QUOTE >

## Typical equipment dimensions

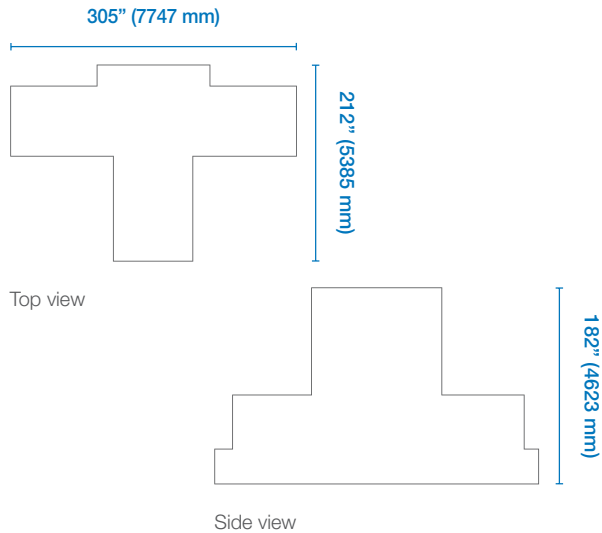

### Stretch dimensions

Up to 56" L x 46" W short side leading  
(Long side leading option available)

### Pallet load

**Height:** up to 10' (3050 mm) including pallet

**Weight:** up to 4400 lb (heavy-duty option available)

### Film thickness

3-5 mil (76-127 Microns)

### Film roll diameter

Max 40" (1000 mm), 3 or 6 in. core

### Operating pressure

85-110 PSI (6-7.6 bar)

### Electrical requirements

480 V / 60 Hz

### Ambient temperature

40 °F to 104 °F (5 °C to 40 °C)

## Features

Secures various products and load sizes with film elasticity of up to 150%

Automatically detects load heights and centers pallets on the conveyor

Can accommodate multiple lines

Eliminates the need for top sheets and prevents loose film underneath the pallet

Allows using pre-printed film with your logo to increase brand visibility at your customers' sites

Low air and power consumption for reduced operational costs

Rugged construction with a compact footprint and low headroom design

Equipped with safety fences and interlocking doors

Complies with Category 3, Performance Level D safety standards

## Options

Two-color continuous film printing (e.g., for a company name/logo)

Sleeving, banding, and double-hooding

Overheight compatibility to handle taller pallet loads

Pallet infeed and outfeed conveying systems



# Lifetime

## Client Solutions

**Premier Tech Client Solutions** take a personalized approach to **lifecycle management**, creating enhanced solutions customized to your specific needs that develop your own capabilities and operational habits, and help you achieve and maintain productivity.

The Client Solutions' passionate team acts as a **partner** by maintaining constant collaboration and putting your interests at the heart of daily decisions throughout your equipment's lifecycle.

Our programs are designed to help you reach your highest **Overall Equipment Effectiveness (OEE)** and maximize your **Return on Investment (ROI)** by providing you with the most valuable lifecycle services in the industry focusing on critical areas such as **24/7 technical support, spare parts, field service, training, system assessments and optimization.**

---



PT Systems and Automation



PTSYSTEMSAUTOMATION.COM

The information contained in this brochure is based upon the latest information available at the time of publication and is designed to provide you with a general introduction to our products. We make no warranties or representations as to its accuracy. We are continually updating and improving our products and reserve the right to amend, discontinue or alter specifications and prices without prior notice. Premier Tech is a registered trademark of Premier Tech Ltd.

20240304  
© Premier Tech Ltd, 2024